


MFC activated carbon filtration



<p>Female thread (BSPP)</p> <p>G 1/2</p>	<p>Flow rate (in m³/h at 7 bar)</p> <p>55</p>	<p>Max operating pressure</p> <p>20 bar</p>	<p>Temperature</p> <p>+5°C to +50°C</p>
<p>Construction</p> <p>Aluminium</p>	<p>Filtration</p> <p>Activated carbon filter</p>		

Description		
Reference	Female thread (BSPP)	Flow rate (in m ³ /h at 7 bar)
MFC 55	G 1/2	55

Reference	Female thread (BSPP)	Flow rate (in m ³ /h at 7 bar)
MFC 70	G 1/2	70
MFC 100	G 1/2	100
MFC 150	G 3/4	150
MFC 225	G 1	225
MFC 300	G 1 1/2	300
MFC 400	G 1 1/2	400
MFC 500	G 2	500
MFC 800	G 2	800
MFC 1550	G 2 1/2	1550

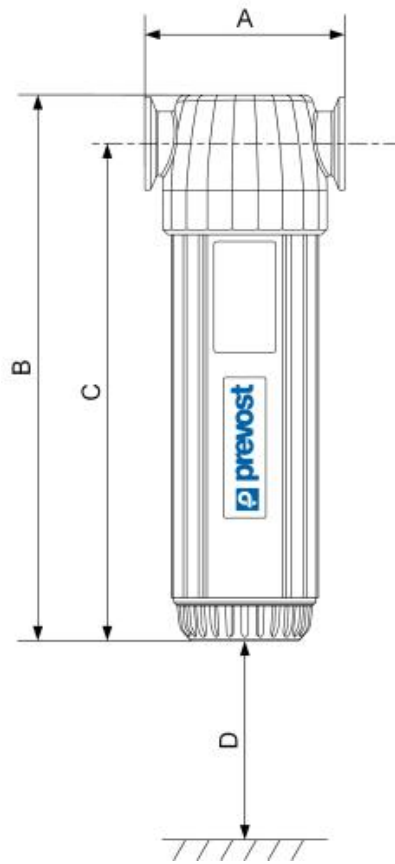

Dimensions

Reference	A mm	B mm	C mm	D mm
MFC 55	90	252	230	19
MFC 70	128	273	250	32
MFC 100	128	303	279	32
MFC 150	140	370	335	31
MFC 225	140	398	365	31
MFC 300	140	474	432	31
MFC 400	140	564	522	31
MFC 500	151	511	465	25

Reference	A mm	B mm	C mm	D mm
MFC 800	151	696	650	25
MFC 1550	240	707	660	25