


## Hose tail coupler



<p><b><u>For hose ID (mm)</u></b> 8</p>	<p><b><u>Technology</u></b> "One push" safety system (avoids hose whip)</p>	<p><b><u>Operating pressure</u></b> 2 to 12 bar</p>	<p><b><u>Flow rate at 6 bar</u></b> 833 l/min (<math>\Delta P = 0,6</math> bar)</p>
<p><b><u>ID Passage</u></b> 6 mm</p>	<p><b><u>Temperature</u></b> -15°C to +70°C</p>	<p><b><u>Construction</u></b> Composite body</p>	<p><b><u>Highlight</u></b> Anti-static Non scratch</p>

Description	
Reference	For hose ID (mm)
<b>USI 061808</b>	8
<b>USI 061810</b>	10

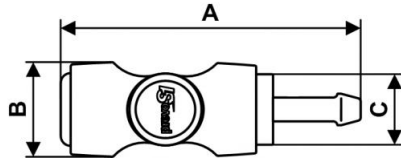

### Dimensions

Reference	A mm	B mm	C mm
<b>USI 061808</b>	86	30	19.4
<b>USI 061810</b>	86	30	19.4