

## thread swivel coupler



**NPT female thread**

3/8" FNPT

**Technology**

"One push" safety system  
(avoids hose whip)

**Operating pressure**

2 to 12 bar

**Flow rate at 6 bar**

2028 l/min ( $\Delta P = 0,6$  bar)

**ID Passage**

8 mm

**Temperature**

-15°C to +70°C

**Construction**

Composite body

**Highlight**

Anti-static Non scratch


### Description

Reference

**USI 081202SW**

NPT female thread

3/8" FNPT

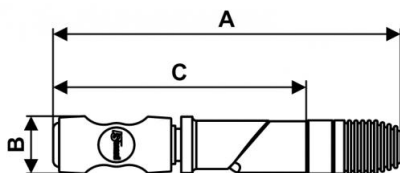

### Dimensions

Reference	A mm	B mm	C mm
<b>USI 081202SW</b>	184	33	139.2