


Bulkhead coupler



<p><u>BSPF female thread</u> G 1/4</p>	<p><u>Drill Ø (mm)</u> 27</p>	<p><u>Panel depth (mm)</u> 11</p>	<p><u>Technology</u> "One push" safety system (avoids hose whip)</p>
<p><u>Operating pressure</u> 2 to 12 bar</p>	<p><u>Flow rate at 6 bar</u> 833 l/min (ΔP : 0,6 bar)</p>	<p><u>ID Passage</u> 6 mm</p>	<p><u>Temperature</u> -15°C to +70°C</p>
<p><u>Construction</u> Composite body</p>	<p><u>Highlight</u> Anti-static Non scratch</p>		

Description			
Reference	BSPF female thread	Drill Ø (mm)	Panel depth (mm)
CSI 062101	G 1/4	27	11

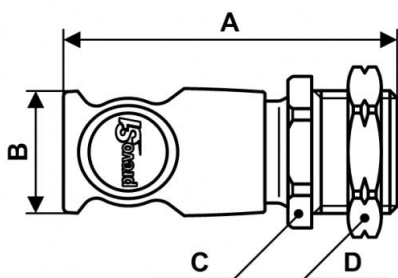

Dimensions

Reference	A mm	B mm	C mm	D mm
CSI 062101	70.5	27	29	32