


# ALTO 3 - 2-piece-set - Filter-Regulator-Lubricator (gauge included) with wall bracket and prevoS1 safety quick release coupler



<p><b><u>BSPP female thread</u></b> G 1/2</p>	<p><b><u>Flow rate (l/min at 7 bar ΔP : 1bar)</u></b> 833</p>	<p><b><u>Max operating pressure (bar)</u></b> 12</p>	<p><b><u>Filtration (μm)</u></b> 25</p>
<p><b><u>Equipped with 1 coupling</u></b> ISI 06</p>	<p><b><u>Temperature</u></b> +5°C to +50 °C</p>	<p><b><u>Construction</u></b> Body : Aluminium Polycarbonate bowl with metallic protection</p>	<p><b><u>Equipped with</u></b> Manual drain</p>

Description						
Reference	BSPP female thread	Flow rate (l/min at 7 bar ΔP	Max operating pressure (bar)	Filtration (μm)	Equipped with 1 coupling	Flow rate (l/min at 7 bar ΔP : 1bar)
<b>KTBSM3BS</b>	G 1/2	1bar) = 750	12	25	BSI 06	833

Reference	BSPP female thread	Flow rate (l/min at 7 bar $\Delta P$ )	Max operating pressure (bar)	Filtration ( $\mu m$ )	Equipped with 1 coupling	Flow rate (l/min at 7 bar $\Delta P$ ; P: 1 bar)
<b>KTB SM3ES</b>	G 1/2	1 bar) = 1820	12	25	ESI 07	
<b>KTB SM3IS</b>	G 1/2		12	25	ISI 06	

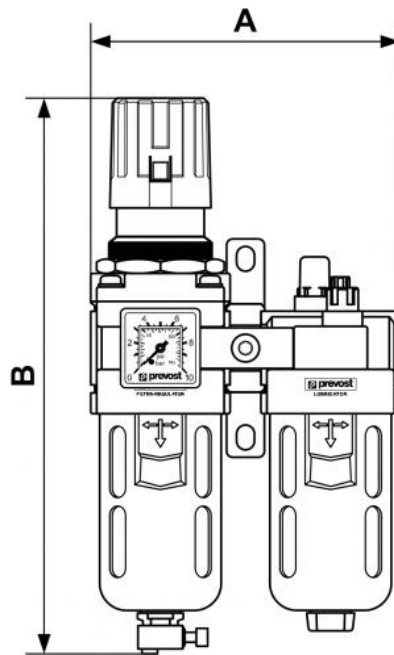

### Dimensions

Reference	A mm	B mm
<b>KTB SM3BS</b>	156	280
<b>KTB SM3ES</b>	156	280
<b>KTB SM3IS</b>	6.142	11.024