


Connection hoses with safety cable - Male swivel connections



| | | | |
|--|--|---|--|
| <u>BSPT male thread</u> R 3/8 | <u>Length (m)</u> 1.5 | <u>Bend radius (at 20°C)(mm)</u> 130 | <u>Max operating pressure (bar)</u> 180 |
| <u>Temperature (°C)</u> -40 to +110 | <u>Construction</u> Rubber with metallic braiding | <u>Highlight</u> Resistant to oils, abrasion and ozone | <u>Equipped with</u> Rotating coupling |

| Description | | | | | |
|----------------|------------------|------------|---------------------------|------------------------------|------------------|
| Reference | BSPT male thread | Length (m) | Bend radius (at 20°C)(mm) | Max operating pressure (bar) | Temperature (°C) |
| LEM 17S | R 3/8 | 1.5 | 130 | 180 | -40 to +110 |
| LEM 21S | R 1/2 | 1.5 | 180 | 160 | -40 to +110 |
| LEM 27S | R 3/4 | 1.5 | 240 | 105 | -40 to +110 |
| LEM 34S | R 1 | 1.5 | 300 | 88 | -40 to +110 |

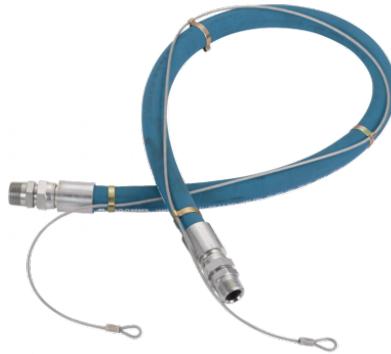