


## Connection hoses with safety cable - Male swivel connections



<b><u>BSPT male thread</u></b> R 3/8	<b><u>Length (m)</u></b> 1.5	<b><u>Bend radius (at 20°C)(mm)</u></b> 130	<b><u>Max operating pressure (bar)</u></b> 180
<b><u>Temperature (°C)</u></b> -40 to +110	<b><u>Construction</u></b> Rubber with metallic braiding	<b><u>Highlight</u></b> Resistant to oils, abrasion and ozone	<b><u>Equipped with</u></b> Rotating coupling

Description					
Reference	BSPT male thread	Length (m)	Bend radius (at 20°C)(mm)	Max operating pressure (bar)	Temperature (°C)
<b>LEM 17S</b>	R 3/8	1.5	130	180	-40 to +110
<b>LEM 21S</b>	R 1/2	1.5	180	160	-40 to +110
<b>LEM 27S</b>	R 3/4	1.5	240	105	-40 to +110
<b>LEM 34S</b>	R 1	1.5	300	88	-40 to +110

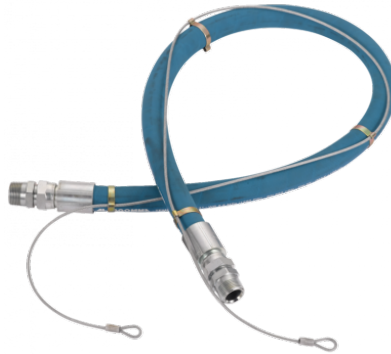