


## Connection hoses with safety cable - Male swivel connections



|  |  |   |  |
|--|--|---|--|
| <u>BSPT male thread</u><br>R 3/8       | <u>Length (m)</u><br>1.5                             | <u>Bend radius (at 20°C)(mm)</u><br>130                   | <u>Max operating pressure (bar)</u><br>180 |
| <u>Temperature (°C)</u><br>-40 to +110 | <u>Construction</u><br>Rubber with metallic braiding | <u>Highlight</u><br>Resistant to oils, abrasion and ozone | <u>Equipped with</u><br>Rotating coupling  |

| Description    |                  |            |                           |                              |                  |
|----------------|------------------|------------|---------------------------|------------------------------|------------------|
| Reference      | BSPT male thread | Length (m) | Bend radius (at 20°C)(mm) | Max operating pressure (bar) | Temperature (°C) |
| <b>LEM 17S</b> | R 3/8            | 1.5        | 130                       | 180                          | -40 to +110      |
| <b>LEM 21S</b> | R 1/2            | 1.5        | 180                       | 160                          | -40 to +110      |
| <b>LEM 27S</b> | R 3/4            | 1.5        | 240                       | 105                          | -40 to +110      |
| <b>LEM 34S</b> | R 1              | 1.5        | 300                       | 88                           | -40 to +110      |

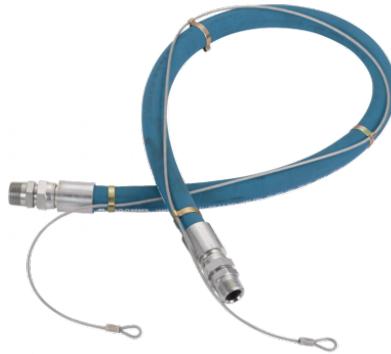