

## Female thread twin coupler



### BSPP female thread

G 1/4

### Technology

"One push" safety system  
(avoids hose whip)

### Operating pressure

2 to 12 bar

### Flow rate at 6 bar

833 l/min ( $\Delta P$  : 0,6 bar)

### ID Passage

6 mm

### Temperature

-15°C to +70°C

### Construction

Composite body

### Highlight

Anti-static Non scratch

## Description

Reference

BSPP female thread

**CSI 068101**


G 1/4

**CSI 068102**

G 3/8

**CSI 068103**

G 1/2

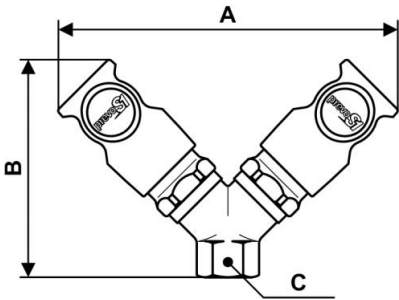

| Dimensions |      |      |      |
|------------|------|------|------|
| Reference  | A mm | B mm | C mm |
| CSI 068101 | 101  | 68   | 17   |
| CSI 068102 | 116  | 74   | 20   |
| CSI 068103 | 125  | 82   | 25   |