


## Tapered parallel male thread twin coupler



<p><b><u>BSPT male thread</u></b></p> <p>R 1/4</p>	<p><b><u>Technology</u></b></p> <p>"One push" safety system (avoids hose whip)</p>	<p><b><u>Operating pressure</u></b></p> <p>2 to 12 bar</p>	<p><b><u>Flow rate at 6 bar</u></b></p> <p>833 l/min (<math>\Delta P</math> : 0,6 bar)</p>
<p><b><u>ID Passage</u></b></p> <p>6 mm</p>	<p><b><u>Temperature</u></b></p> <p>-15°C to +70°C</p>	<p><b><u>Construction</u></b></p> <p>Composite body</p>	<p><b><u>Highlight</u></b></p> <p>Anti-static Non scratch</p>

Description	
Reference	BSPT male thread
<b>CSI 068151</b>	R 1/4
<b>CSI 068152</b>	R 3/8
<b>CSI 068153</b>	R 1/2

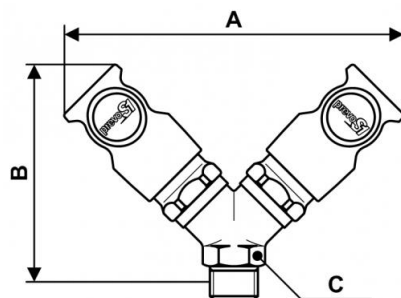

### Dimensions

Reference	A mm	B mm	C mm
<b>CSI 068151</b>	110	75	17
<b>CSI 068152</b>	116	80	20
<b>CSI 068153</b>	125	88	25