


Hose tail coupler - Stainless Steel



<p><u>For hose ID (mm)</u></p> <p>8</p>	<p><u>Technology</u></p> <p>"One push" safety system (avoids hose whip)</p>	<p><u>Operating pressure</u></p> <p>2 to 12 bar</p>	<p><u>Flow rate at 6 bar</u></p> <p>1 820 l/min ($\Delta P = 0,6$ bar)</p>
<p><u>ID Passage</u></p> <p>7,4 mm</p>	<p><u>Temperature</u></p> <p>-15°C to +70°C</p>	<p><u>Construction</u></p> <p>Composite body Stainless steel valve</p>	<p><u>Applications</u></p> <p>Corrosive atmospheres</p>
<p><u>Highlight</u></p> <p>Anti-static Non scratch</p>			

Description	
Reference	For hose ID (mm)
ESI 071808HE	8
ESI 071809HE	9

Reference	For hose ID (mm)
ESI 071810HE	10

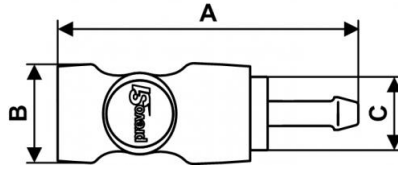

Dimensions

Reference	A mm	B mm	C mm
ESI 071808HE	87.3	32.2	23
ESI 071809HE	87.3	32.2	23
ESI 071810HE	87.3	32.2	23