


## Parallel female thread coupler



<p><b><u>BSPP female thread</u></b> G 3/8</p>	<p><b><u>Profile</u></b> European 10,4 mm</p>	<p><b><u>Technology</u></b> "One push" safety system (avoids hose whip)</p>	<p><b><u>Operating pressure</u></b> 2 to 16 bar</p>
<p><b><u>Flow rate at 6 bar</u></b> 3530 l/min (<math>\Delta P = 0,6</math> bar)</p>	<p><b><u>ID Passage</u></b> 10,4 mm</p>	<p><b><u>Temperature</u></b> -15°C to +70°C</p>	<p><b><u>Construction</u></b> Body : Stainless steel</p>
<p><b><u>Highlight</u></b> Anti-static Excellent efficiency Harsh conditions</p>			

Description	
Reference	BSPP female thread
<b>ESI 111102</b>	G 3/8
<b>ESI 111103</b>	G 1/2
<b>ESI 111104</b>	G 3/4

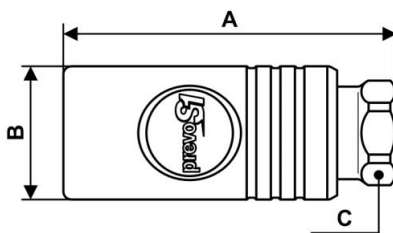

### Dimensions

Reference	A mm	B mm	C mm
<b>ESI 111102</b>	92.5	37	26
<b>ESI 111103</b>	93.5	37	26
<b>ESI 111104</b>	102	37	30