

Parallel female thread coupler



BSPF female thread

G 3/8

Technology

"One push" safety system
(avoids hose whip)

Operating pressure

2 to 16 bar

Flow rate at 6 bar

3686 l/min ($\Delta P = 0,6$ bar)

ID Passage

11 mm

Temperature

-15°C to +70°C

Construction


Body : Stainless steel

Highlight

Anti-static Excellent
efficiency Harsh conditions

Description

| Reference | BSPF female thread |
|-------------------|--------------------|
| ISI 111102 | G 3/8 |
| ISI 111103 | G 1/2 |
| ISI 111104 | G 3/4 |

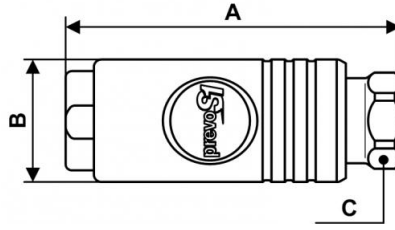

Dimensions

| Reference | A mm | B mm | C mm |
|-------------------|-------|------|------|
| ISI 111102 | 101 | 37 | 26 |
| ISI 111103 | 102 | 37 | 26 |
| ISI 111104 | 110.5 | 37 | 30 |