

Parallel female thread coupler



BSPF female thread

G 3/8

Technology

"One push" safety system
(avoids hose whip)

Operating pressure

2 to 16 bar

Flow rate at 6 bar

3686 l/min ($\Delta P = 0,6$ bar)

ID Passage

11 mm

Temperature

-15°C to +70°C

Construction


Body : Stainless steel

Highlight

Anti-static Excellent
efficiency Harsh conditions

Description

Reference	BSPF female thread
ISI 111102	G 3/8
ISI 111103	G 1/2
ISI 111104	G 3/4

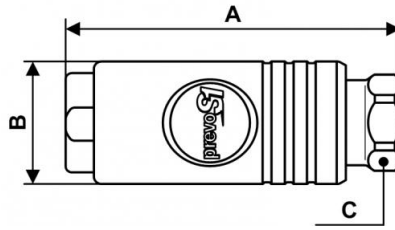

Dimensions

Reference	A mm	B mm	C mm
ISI 111102	101	37	26
ISI 111103	102	37	26
ISI 111104	110.5	37	30