

## Parallel male thread coupler



**BSP male thread**

G 3/8

**Technology**

"One push" safety system  
(avoids hose whip)

**Operating pressure**

2 to 16 bar

**Flow rate at 6 bar**

3686 l/min ( $\Delta P = 0,6$  bar)

**ID Passage**

11 mm

**Temperature**

-15°C to +70°C

**Construction**


Body : Stainless steel

**Highlight**

Anti-static Excellent  
efficiency Harsh conditions

### Description

Reference	BSP male thread
<b>ISI 111152</b>	G 3/8
<b>ISI 111153</b>	G 1/2
<b>ISI 111154</b>	G 3/4

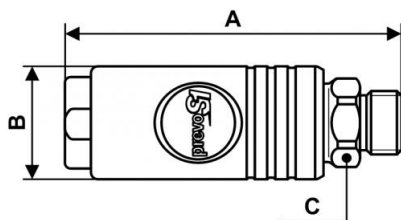

### Dimensions

Reference	A mm	B mm	C mm
<b>ISI 111152</b>	108.9	37	26
<b>ISI 111153</b>	109.9	37	26
<b>ISI 111154</b>	114.4	37	32