


## Hose tail coupler



<p><b><u>For hose ID (mm)</u></b> 10</p>	<p><b><u>Technology</u></b> "One push" safety system (avoids hose whip)</p>	<p><b><u>Operating pressure</u></b> 2 to 16 bar</p>	<p><b><u>Flow rate at 6 bar</u></b> 3686 l/min (<math>\Delta P = 0,6</math> bar)</p>
<p><b><u>ID Passage</u></b> 11 mm</p>	<p><b><u>Temperature</u></b> -15°C to +70°C</p>	<p><b><u>Construction</u></b> Body : Stainless steel</p>	<p><b><u>Highlight</u></b> Anti-static Excellent efficiency Harsh conditions</p>

Description	
Reference	For hose ID (mm)
<b>ISI 111810</b>	10
<b>ISI 111813</b>	13
<b>ISI 111816</b>	16
<b>ISI 111819</b>	19

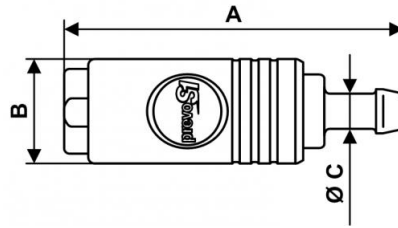

### Dimensions

Reference	A mm	B mm	C mm
<b>ISI 111810</b>	136	37	10
<b>ISI 111813</b>	120	37	12.5
<b>ISI 111816</b>	120	37	15.5
<b>ISI 111819</b>	161	37	18.5