


Hose tail coupler



<p><u>For hose ID (mm)</u> 10</p>	<p><u>Technology</u> "One push" safety system (avoids hose whip)</p>	<p><u>Operating pressure</u> 2 to 16 bar</p>	<p><u>Flow rate at 6 bar</u> 3686 l/min ($\Delta P = 0,6$ bar)</p>
<p><u>ID Passage</u> 11 mm</p>	<p><u>Temperature</u> -15°C to +70°C</p>	<p><u>Construction</u> Body : Stainless steel</p>	<p><u>Highlight</u> Anti-static Excellent efficiency Harsh conditions</p>

Description	
Reference	For hose ID (mm)
ISI 111810	10
ISI 111813	13
ISI 111816	16
ISI 111819	19

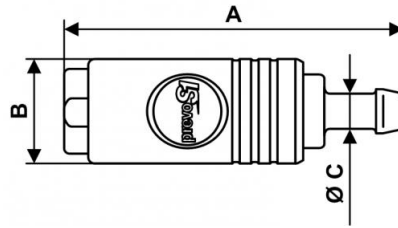

Dimensions

Reference	A mm	B mm	C mm
ISI 111810	136	37	10
ISI 111813	120	37	12.5
ISI 111816	120	37	15.5
ISI 111819	161	37	18.5