

## Parallel female thread coupler



### NPT female thread

3/8" FNPT

### Profile

Truflate

### Technology

"One push" safety system  
(avoids hose whip)

### Operating pressure

2 to 16 bar

### Flow rate at 6 bar

2987 l/min ( $\Delta P = 0,6$  bar)

### ID Passage

11 mm

### Temperature

-15°C to +70°C

### Construction

Stainless steel

### Highlight

Anti-static Excellent  
efficiency Harsh conditions

## Description

Reference

NPT female thread

**USI 111202**


3/8" FNPT

**USI 111203**

1/2" FNPT

**USI 111204**

3/4" FNPT

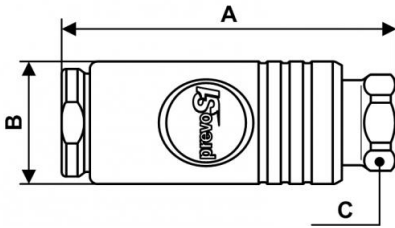

Dimensions			
Reference	A mm	B mm	C mm
USI 111202	99.5	37	26
USI 111203	102	37	26
USI 111204	108	37	30