


Parallel female thread coupler



<p><u>NPT female thread</u> 3/8" FNPT</p>	<p><u>Profile</u> Truflate</p>	<p><u>Technology</u> "One push" safety system (avoids hose whip)</p>	<p><u>Operating pressure</u> 2 to 16 bar</p>
<p><u>Flow rate at 6 bar</u> 2987 l/min ($\Delta P = 0,6$ bar)</p>	<p><u>ID Passage</u> 11 mm</p>	<p><u>Temperature</u> -15°C to +70°C</p>	<p><u>Construction</u> Stainless steel</p>
<p><u>Highlight</u> Anti-static Excellent efficiency Harsh conditions</p>			

Description	
Reference	NPT female thread
USI 111202	3/8" FNPT
USI 111203	1/2" FNPT
USI 111204	3/4" FNPT

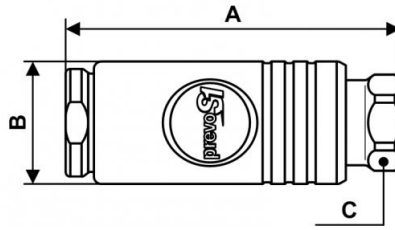

Dimensions

Reference	A mm	B mm	C mm
USI 111202	99.5	37	26
USI 111203	102	37	26
USI 111204	108	37	30