


Male thread coupler



<p><u>NPT male thread</u> 3/8" MNPT</p>	<p><u>Profile</u> Truflate</p>	<p><u>Technology</u> "One push" safety system (avoids hose whip)</p>	<p><u>Operating pressure</u> 2 to 16 bar</p>
<p><u>Flow rate at 6 bar</u> 2987 l/min ($\Delta P = 0,6$ bar)</p>	<p><u>ID Passage</u> 11 mm</p>	<p><u>Temperature</u> -15°C to +70°C</p>	<p><u>Construction</u> Stainless steel</p>
<p><u>Highlight</u> Anti-static Excellent efficiency Harsh conditions</p>			

Description	
Reference	NPT male thread
USI 111252	3/8" MNPT
USI 111253	1/2" MNPT
USI 111254	3/4" MNPT

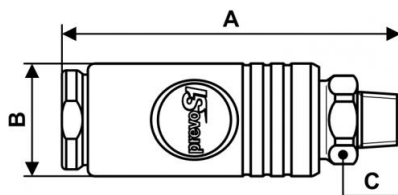

Dimensions

Reference	A mm	B mm	C mm
USI 111252	112	37	26
USI 111253	116	37	26
USI 111254	118	37	30