


Hose tail coupler



<p><u>For hose ID (mm)</u></p> <p>10</p>	<p><u>Profile</u></p> <p>Truflate</p>	<p><u>Technology</u></p> <p>"One push" safety system (avoids hose whip)</p>	<p><u>Operating pressure</u></p> <p>2 to 16 bar</p>
<p><u>Flow rate at 6 bar</u></p> <p>2987 l/min ($\Delta P = 0,6$ bar)</p>	<p><u>ID Passage</u></p> <p>11 mm</p>	<p><u>Temperature</u></p> <p>-15°C to +70°C</p>	<p><u>Construction</u></p> <p>Stainless steel</p>
<p><u>Highlight</u></p> <p>Anti-static Excellent efficiency Harsh conditions</p>			

Description	
Reference	For hose ID (mm)
USI 111810	10
USI 111813	13
USI 111819	19

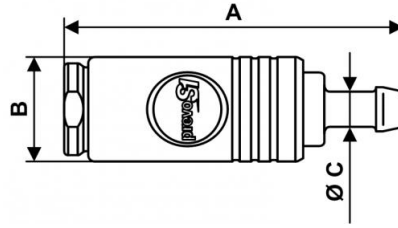

Dimensions

Reference	A mm	B mm	C mm
USI 111810	136.5	37	10
USI 111813	120.4	37	12.5
USI 111819	161.5	37	18.5