


## Hose tail coupler



<p><b><u>For hose ID (mm)</u></b></p> <p>10</p>	<p><b><u>Profile</u></b></p> <p>Truflate</p>	<p><b><u>Technology</u></b></p> <p>"One push" safety system (avoids hose whip)</p>	<p><b><u>Operating pressure</u></b></p> <p>2 to 16 bar</p>
<p><b><u>Flow rate at 6 bar</u></b></p> <p>2987 l/min (<math>\Delta P = 0,6</math> bar)</p>	<p><b><u>ID Passage</u></b></p> <p>11 mm</p>	<p><b><u>Temperature</u></b></p> <p>-15°C to +70°C</p>	<p><b><u>Construction</u></b></p> <p>Stainless steel</p>
<p><b><u>Highlight</u></b></p> <p>Anti-static Excellent efficiency Harsh conditions</p>			

Description	
Reference	For hose ID (mm)
<b>USI 111810</b>	10
<b>USI 111813</b>	13
<b>USI 111819</b>	19

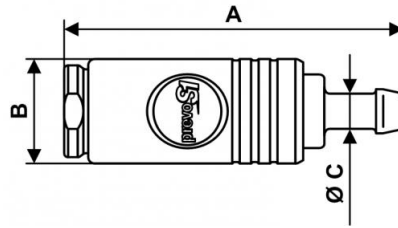

### Dimensions

Reference	A mm	B mm	C mm
<b>USI 111810</b>	136.5	37	10
<b>USI 111813</b>	120.4	37	12.5
<b>USI 111819</b>	161.5	37	18.5