

PPS1 CR - Aluminum Cross Connection



Outlet BSPP female thread

(1) G 1/2

For tube OD

-

Technology

PPS Grip Concept

Operating pressure

0 to 16 bar

Vacuum capability

-0.98 bar (vacuum 98%)

Temperature

-20°C to +80°C

Construction

Pipe and fittings: alu.

Highlight

Scalable system


Meets standards

PED REACH

Description

Reference	Outlet BSPP female thread	For tube OD
PPS1 CR12	(1) G 1/2	-
PPS1 CR27	(1) G 3/4	-
PPS1 CR34	(1) G 1	-
PPS1 CR49	(1) G 1 1/2	-

Reference	Outlet BSPP female thread	For tube OD
PPS1 CR50	-	(2) 50
PPS1 CR63	-	(2) 63
PPS1 CR80	-	(2) 80
PPS1 CR100	-	(2) 100
PPS1 CR160	-	(3) 160

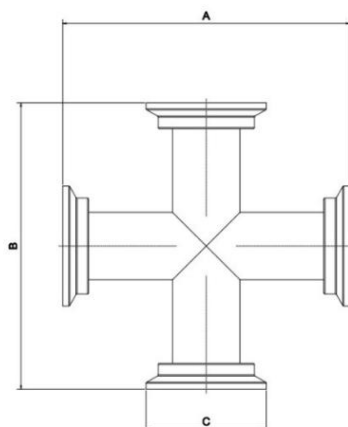

Dimensions			
Reference	A mm	B mm	C mm
PPS1 CR12	50	50	60
PPS1 CR27			
PPS1 CR34	70	70	70
PPS1 CR49	90	90	80
PPS1 CR50	215	215	90
PPS1 CR63	240	240	110
PPS1 CR80	260	260	125
PPS1 CR100	310	310	154
PPS1 CR160	400	400	202